



**USA
SLIDING
DOORS**

43676 Progress Way, Chilliwack, BC V2R 0C3
604.607.0091 | **Toll Free:** 1.800.770.0455
info@advantecglobal.com | usaslidingdoors.com

Double Electric Personnel Door

Model Number: USA-1002

Dual electric sliding personnel door, watertight to 32' head pressure.




*Custom sizes and pressures available upon request.

RATING: WT

CLEAR OPENING SIZE:

Tolerance $\pm 1/8$ "

| | Min | Max |
|-----|-----|-----|
| "A" | 31" | 47" |
| "B" | 70" | 78" |

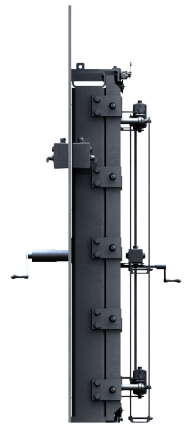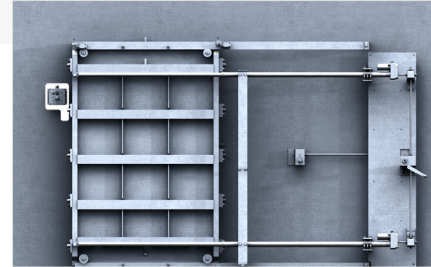

POWER REQUIREMENTS:

- 115VAC, 60Hz, 40 A
(AVG: 575W)

WEIGHT:

- Approx.: 2600 LB.

MINIMUM CLOSING TIME:

- 40 Sec.

FRAME FINISH OPTIONS:

- Bare Metal, Mill Finish
- Primer Paint
- Primer Base Coats
- Topcoat
- Powder Coat

OF DOG PINS:

- 10

DOOR MATERIAL:

- Mild Steel
- Aluminum

FRAME MATERIAL:

- Mild Steel
(For Steel Door Only)
- Aluminum
(For Aluminum Door Only)

GASKET:

- Neoprene

ACTUATION:

- Dual Electric

SAFETY FEATURES:

- Hazard Lights
- Hazard Buzzer

OPERATION:

- Manual (Hand Crank)
- Electrically Powered
- Locally Operated
- Bridge Controlled

CLASS OPTIONS:

(Vessel type and size rule set typically reviewed for Class)

- ABS
- DNV-GL
- LR

AVAILABLE DOCUMENTS:

- Wiring Diagrams
- Installation Manual



ISO 9001
**PROUDLY MADE IN
NORTH AMERICA**