

	ITEMS		
ID	DESCRIPTION	MATERIAL	PART NUMBER
1	MOUNTING FRAME	6063 ALUMINUM	D11374
2	GLAZING	GLASS 6mm (1/4") TO 12mm (1/2")	
3	FULCRUM GLAZING	SANTOPRENE	
4	BUTYL TAPE		
5	SEALANT	SILICONE	D10857
6	TRIM RING	6063 ALUMINUM	
7	TRIM SCREWS	S.S.	D12239
8	BEDDING COMPOUND	CUSTOMER TO SUPPLY	
9	BACKFILL	URETHANE	D10858

STANDA	ARD DIMENSIONS	
ID	DESCRIPTION	DIMENSION
Α	FLANGE COVERAGE	20mm (13/16")
В	EXTERIOR PROTRUSION	3mm (1/8")
С	INTERIOR PROTRUSION	35mm (1 3/8")
D	SPIGOT TO CLEAR VIEW	38 mm (1 1/2")
E	FLANGE THICKNESS	3mm (1/8")



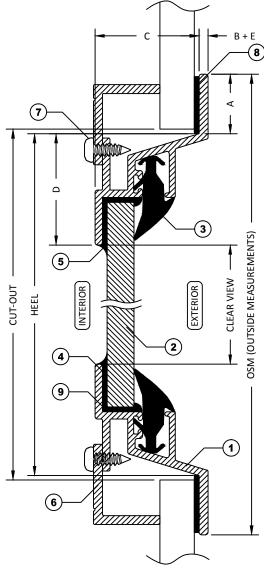

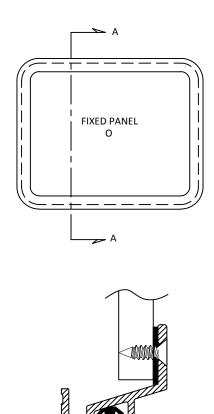

OPTIONAL BOLT-ON INSTALLATION

## NOTES: )

- -GENERAL HEEL TOLERANCE +0/-1/4" OVERALL
- -AVAILABLE WITH 3"(76MM) OR MITERED CORNERS
- -STANDARD MOUNTING HOLES ARE 3/16" WITH #10 COUNTERSUNK ON 6" NOMINAL CENTERS
- -FULCRUM GLAZING DEPENDENT ON GLASS THICKNESS

DRAWING NUMBER	106F	DIAMOND SEA GLAZE MANUFACTURING LTD 26995 GLOUCESTER WAY, LANGLEY B.C. CANADA V4W 3Y3 TOLL FREE: 1-800-770-0455 PHONE: 604-607-0091 FAX: 604-607-0092
NTS	LD	

ALL DRAWINGS AND ANY ASSOCIATED INFORMATION HEREON CONTAIN PROPRIETARY AND/OR CONFIDENTIAL INFORMATION, AND SHALL NOT BE REPRODUCED, DISCLOSED OR SUBMITTED TO ANY THIRD PARTY WITHOUT PRIOR CONSENT FROM DIAMOND SEA GLAZE MANUFACTURING LTD.

Diamond Sea Glaze

REVISION ITEM NAME 106F 3

ITEM DESCRIPTION **FIXED WINDOW**